
---, ---
---, --- ---
Comment: ---

Operator: SC3 User
Order number: ---

Aperture: 6 mil, 0.152 mm
Wavelength: Laser 670 nm
Unit: Micrometer[μm]
Date: 6/14/2013 11:04:24 AM
Device: REA ScanCheck 3 (V.1.0.13.2/11942r)
Serial Number: 0030.207.106-04723-1

Symbology: Code 128
Code Content: CODE128_A_TEST

User comment:

Evaluation: ISO/IEC 15416, ISO/IEC 15417

Symbol: Pass 3.0/06/670

Selected grade: 2.5 (B)
SRP grade: 3.0 (B)

Decode:				4
Symbol contrast:	73%	min 55%		4
Edge Contrast:	44%	min 15%		4
Modulation:	60%	min 60%		3
Rmin/Rmax:	4%	max 50%		4
Defects:	15%	max 20%		4
Decodability:	72%	min 50%		4

Bar deviation: -5%

Optional Parameters

PCS(SC):	0.96	min 0.75		4
Bright value(Rmax):	76%	min 25%		4
Dark value(Rmin):	3%	max 38%		4
PCS(ECMin):	0.79	min 0.75		4
Bright value(Rs):	56%	min 25%		4
Dark value(Rb):	11%	max 28%		4
Bar:	-50%	20%	-100%/+100%	4
Space:	-25%	55%	-100%/+100%	4
E-Value:	-65%	50%	-100%/+100%	4
P-Value:	-75%	65%	-100%/+100%	4
Mean:		-16%	-100%/+100%	4
Z-Module:		265		
MF:		0.265		
CPI:		8.710		

 ---, ---
 ---, --- ---
 Comment: ---

Operator: SC3 User
 Order number: ---
 Aperture: 6 mil, 0.152 mm
 Wavelength: Laser 670 nm
 Unit: Micrometer[μm]
 Date: 6/14/2013 11:04:24 AM
 Device: REA ScanCheck 3 (V.1.0.13.2/11942r)
 Serial Number: 0030.207.106-04723-1

Detailed evaluation:
 B = Bar, S = Space, E = Bar + Space
 C = Char, CS = Char set, SCV = Value
 P = P-value, V = Decodability[%]

C	B S E P	B S E V1	B S E V2	E CS	SCV
	-20%	5%	-10%		
	0%	-15%	0%		
StartA	-35%	15%	-15%	-50%	
	-75%	81%	75%	A	103
	10%	20%	-30%		
	-25%	0%	20%		
C	-35%	-15%	35%	-55%	
	-20%	76%	76%	A	35
	-15%	-35%	-50%		
	0%	55%	10%		
O	-25%	-65%	35%	10%	
	-60%	72%	94%	A	47
	0%	-30%	-5%		
	20%	10%	-10%		
D	30%	-20%	-35%	5%	
	-40%	87%	83%	A	36
	0%	-20%	-5%		
	10%	20%	-5%		
E	20%	-15%	0%	20%	
	0%	85%	80%	A	37
	15%	-10%	-20%		
	5%	5%	45%		
1	35%	-10%	-10%	-25%	
	65%	77%	86%	A	17
	-35%	-20%	0%		
	25%	20%	25%		
2	-20%	10%	0%	30%	
	20%	87%	87%	A	18

 ---, ---
 ---, --- ---
 Comment: ---

Operator: SC3 User
 Order number: ---
 Aperture: 6 mil, 0.152 mm
 Wavelength: Laser 670 nm
 Unit: Micrometer[μm]
 Date: 6/14/2013 11:04:24 AM
 Device: REA ScanCheck 3 (V.1.0.13.2/11942r)
 Serial Number: 0030.207.106-04723-1


	-45%	-5%	-5%		
	35%	-5%	15%		
	-15%	50%	-20%	-20%	
8	-20%	76%	88%	A	24
<hr/>					
	-20%	-5%	-20%		
	30%	15%	0%		
	20%	50%	15%	-15%	
-	0%	75%	83%	A	63
<hr/>					
	0%	-15%	0%		
	25%	10%	5%		
	45%	15%	-10%	15%	
A	45%	76%	80%	A	33
<hr/>					
	-20%	-15%	-20%		
	30%	15%	25%		
	10%	20%	-5%	-5%	
-	20%	85%	87%	A	63
<hr/>					
	-25%	-20%	-10%		
	40%	5%	10%		
	30%	35%	-25%	-5%	
T	0%	81%	89%	A	52
<hr/>					
	0%	-25%	-10%		
	15%	25%	0%		
	25%	-20%	0%	25%	
E	10%	78%	83%	A	37
<hr/>					
	-15%	-45%	0%		
	40%	25%	10%		
	45%	-10%	-35%	45%	
S	35%	82%	96%	A	51
<hr/>					
	-35%	-30%	-10%		
	30%	10%	20%		
	-10%	0%	-40%	0%	
T	-30%	86%	91%	A	52
<hr/>					
	-35%	-40%	-20%		
	45%	25%	15%		
	15%	5%	-35%	5%	
CD	-25%	88%	95%		52

 ---, ---
 ---, --- ---
 Comment: ---

Operator: SC3 User
 Order number: ---
 Aperture: 6 mil, 0.152 mm
 Wavelength: Laser 670 nm
 Unit: Micrometer[μm]
 Date: 6/14/2013 11:04:24 AM
 Device: REA ScanCheck 3 (V.1.0.13.2/11942r)
 Serial Number: 0030.207.106-04723-1

	-20%	-35%	-15%		
	15%	15%	25%		
Stop >	-5%	-25%	-30%	0%	
	-25%	84%	89%		106
	-10%	-15%	-35%		
	25%	15%	15%		
Stop <	20%	15%	0%	-30%	
	-5%	86%	89%		106

Histogram:

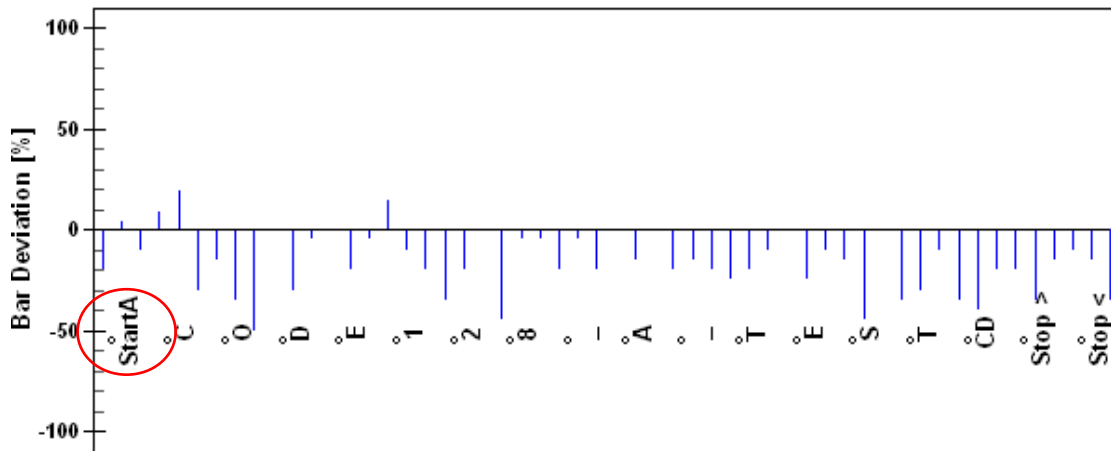

---, ---
---, --- ---
Comment: ---

Operator: SC3 User
Order number: ---
Aperture: 6 mil, 0.152 mm
Wavelength: Laser 670 nm
Unit: Micrometer[μ m]
Date: 6/14/2013 11:04:24 AM
Device: REA ScanCheck 3 (V.1.0.13.2/11942r)
Serial Number: 0030.207.106-04723-1

Barcode reflectance profile:

