
---, ---
---, --- ---
Comment: ---

Operator: WELCOM
Order number: ---

Aperture: 6 mil, 0.152 mm
Wavelength: LED 625 nm
Unit: Micrometer[μm]
Date: 6/19/2013 1:20:15 PM
Device: REA Check ER (V.1.0.16.0/12302r)
Serial Number: 0030.016.106-00148-4

Symbology: Code 128
Code Content: 26477797

User comment:

Evaluation: ISO/IEC 15416, ISO/IEC 15417

Symbol: Pass 3.0/06/625

Selected grade: 2.5 (B)
SRP grade: 3.0 (B)

Decode:			4
Symbol contrast:	74%	min 55%	4
Edge Contrast:	51%	min 15%	4
Modulation:	69%	min 60%	3
Rmin/Rmax:	9%	max 50%	4
Defects:	11%	max 20%	4
Decodability:	75%	min 50%	4
Bar deviation:	-3%		

Optional Parameters

PCS(SC):	0.90	min 0.75	4
Bright value(Rmax):	81%	min 25%	4
Dark value(Rmin):	8%	max 40%	4
PCS(ECMin):	0.85	min 0.75	4
Bright value(Rs):	60%	min 25%	4
Dark value(Rb):	9%	max 30%	4
Bar:	-35 17	-88/+88	4
Space:	-18 35	-88/+88	4
E-Value:	-20 22	-51/+51	4
P-Value:	-28 26	-51/+51	4
Mean:	-9	-88/+88	4
Z-Module:	254		
MF:	0.250		
CPI:	9.100		

 ---, ---
 ---, --- ---
 Comment: ---

Operator: WELCOM
 Order number: ---
 Aperture: 6 mil, 0.152 mm
 Wavelength: LED 625 nm
 Unit: Micrometer[μm]
 Date: 6/19/2013 1:20:15 PM
 Device: REA Check ER (V.1.0.16.0/12302r)
 Serial Number: 0030.016.106-00148-4

Detailed evaluation:
 B = Bar, S = Space, E = Bar + Space
 C = Char, CS = Char set, SCV = Value
 P = P-value, V = Decodability[%]

C	B S E P	B S E V1	B S E V2	E CS	SCV
	-11 10 -2 -4	-4 9 6 93%	-9 2 5 89%	-1 C	105
26	-4 -5 -9 -13	5 -7 1 86%	-12 10 -2 85%	-19 C	26
47	2 -3 -2 10	-16 26 -20 78%	-25 28 10 94%	1 C	47
77	-35 33 -1 5	-33 22 0 91%	-17 35 -12 94%	5 C	77
97	-35 19 -16 -28	-9 0 10 82%	14 -18 -9 88%	14 C	97
CD	8 -11 -3 26	17 5 6 75%	-22 29 22 87%	-18	20
Stop >	-12 7 -5 4	-10 11 -3 91%	0 8 1 90%	11	106

 ---, ---
 ---, --- ---
 Comment: ---


Operator: WELCOM
 Order number: ---
 Aperture: 6 mil, 0.152 mm
 Wavelength: LED 625 nm
 Unit: Micrometer[μm]
 Date: 6/19/2013 1:20:15 PM
 Device: REA Check ER (V.1.0.16.0/12302r)
 Serial Number: 0030.016.106-00148-4

	-2	0	-10		
	8	11	7		
	6	8	11	1	
Stop <	14	91%	88%		106

Table of codewords

105	26	47	77	97	20	106
StartC	2 6	4 7	7 7	9 7	20	Stop

Histogram:

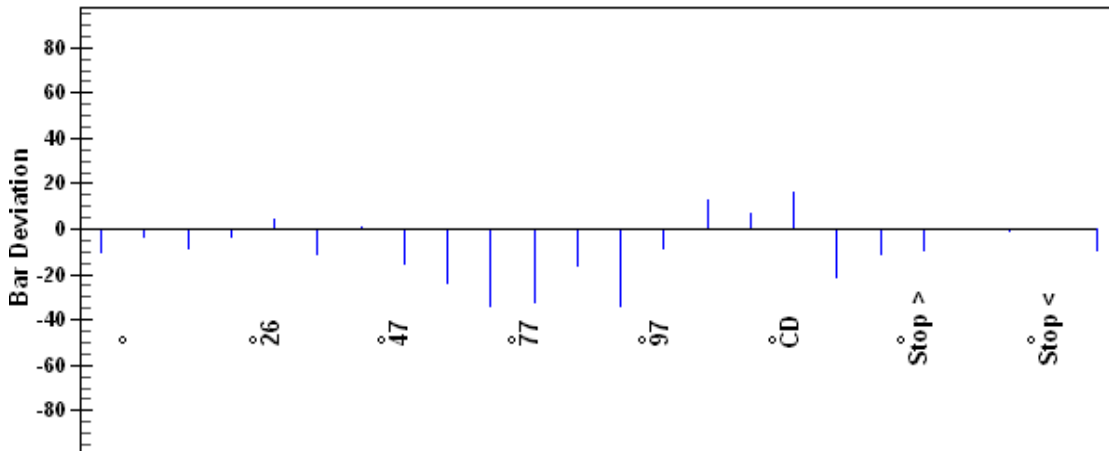

---, ---
---, --- ---
Comment: ---

Operator: WELCOM
Order number: ---
Aperture: 6 mil, 0.152 mm
Wavelength: LED 625 nm
Unit: Micrometer[μ m]
Date: 6/19/2013 1:20:15 PM
Device: REA Check ER (V.1.0.16.0/12302r)
Serial Number: 0030.016.106-00148-4

Barcode reflectance profile:

